

AP mode Wi-Fi configuration instructions

AP mode would be suitable for the following 3 situation:

1. Port of LAN is defective; 2. no network cable available; 3. no network port on router.

This mode can only work after the camera is restored to factory setting. If you want to use this function, please reset the camera by pressing the reset button of the camera for 5s.

1. Turn on your phone Location.




2. Have camera powered, don't connect the network cable.

3. Wait about 1min and then get in to the mobile phone Settings page. Turn on your WIFI to search out the camera's SSID of AP mode, select and connect camera's AP by entering default password: 01234567


Note:

Name of SSID: IPCAM- XXXXXX ("XXXXXX" refers to the middle 6 digits of your camera UID)


Default password: 01234567

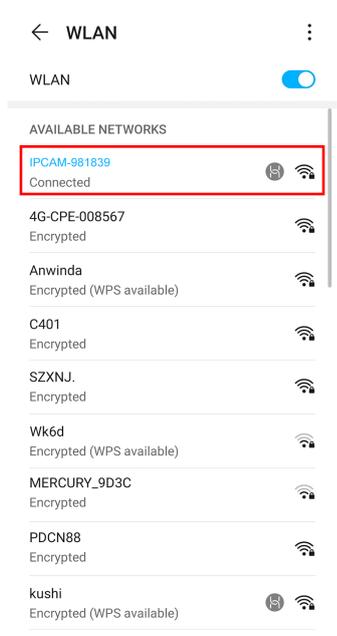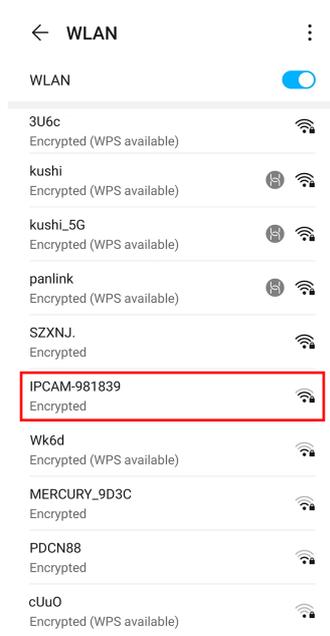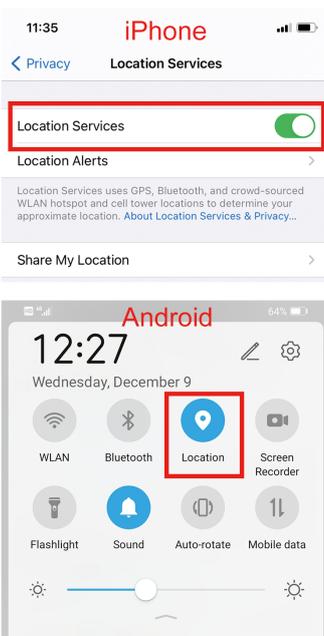

4. Open the 'GENBOLT CAM' app, click 'Add Camera', click 'Search Camera from LAN' to search camera UID. Camera UID will appear automatically, default password 'admin', click 'Done' in the upper right corner.

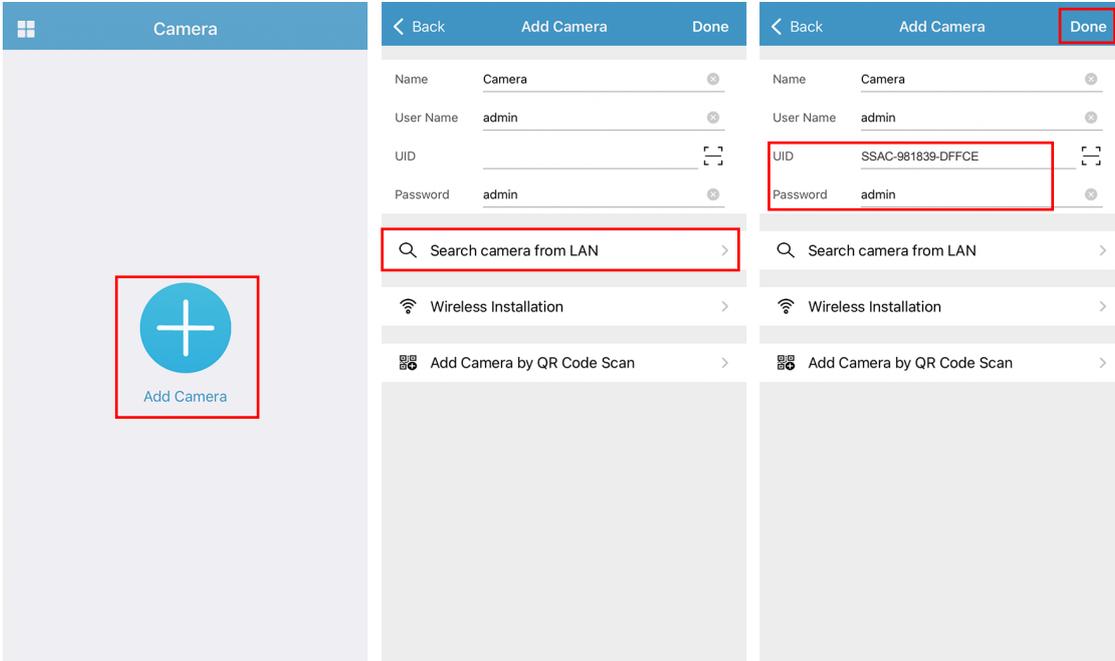

5. After camera is added, please get into camera setting page, click 'Wi-Fi Setting' and select your phone Wi-Fi to build wireless network configuration.

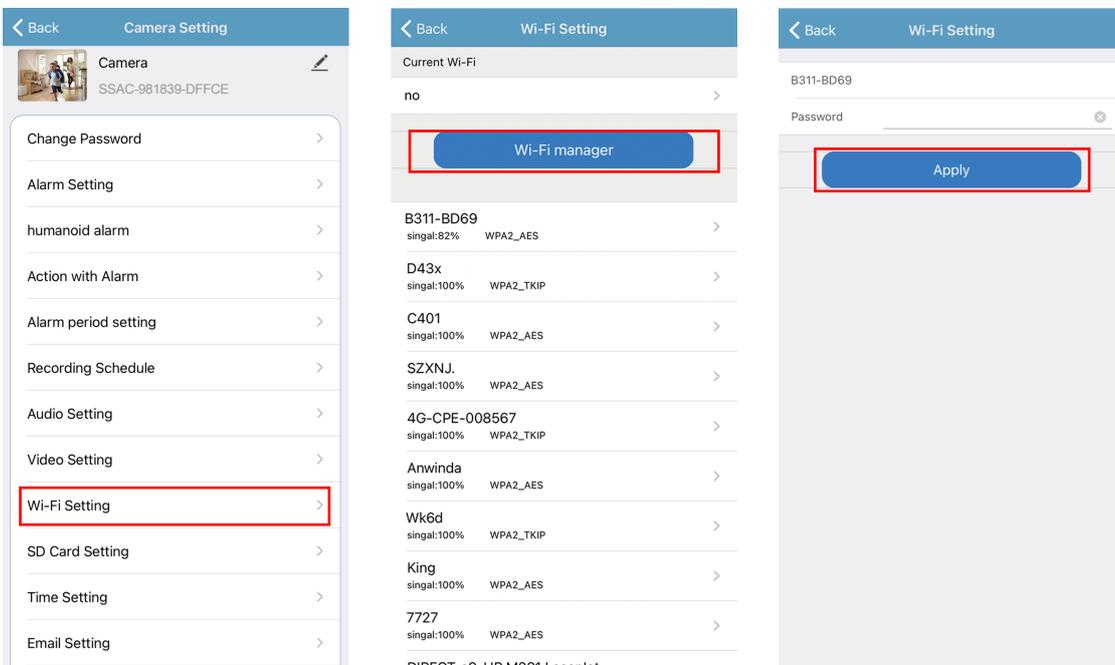

Note: AP mode will disappear automatically when Wi-Fi is configured in AP mode. If you want to continue using AP mode, you must restore the camera to factory settings again.